



“Eye-safe” 1,54  $\mu\text{m}$  ns laser

## KAUKAS 2



### FEATURES:

Compact robust design  
High energy per pulse > 2mJ  
OEM version available

### APPLICATIONS:

LIDAR and Laser Ranging  
LIBS  
Metrology and instrumentation



**Laser characteristics:**

Wavelength	1534 nm
Wavelength tolerance	$\pm 1$ nm
Pulse energy	>2 mJ
Average output power	2 mW
Energy stability (2 hr), @1 Hz	<1 %
Pulse duration	<15 ns
Pulse repetition rate	0,5 – 1 Hz
Polarization contrast	>1:80
Beam diameter at exit window	<1 mm
Beam divergence	<5 mRad
Beam profile	TEM <sub>00</sub>

**Physical dimensions:**


Laser module dimensions	61 x 33 x 29,5 mm (L x W x H)
Laser driver dimensions	128 x 83 x 48 mm (L x W x H)
Power supply dimensions	245 x 105 x 65 mm (L x W x H)

**Utility requirements:**


Pump current	<100 A
Pump time	>6 ms
Working temperature	-20 ... +60°C
Cooling	Passive air cooling



Laser beam profile and laser pulse duration data:

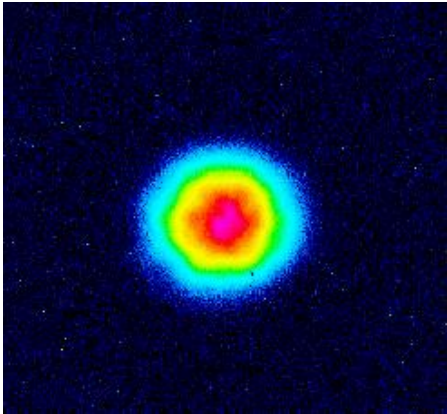


Beam profile at 1 Hz laser repetition rate

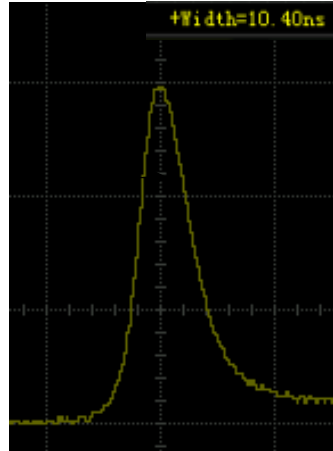

10,4 ns pulse duration at 1 Hz repetition rate

Output energy stability:

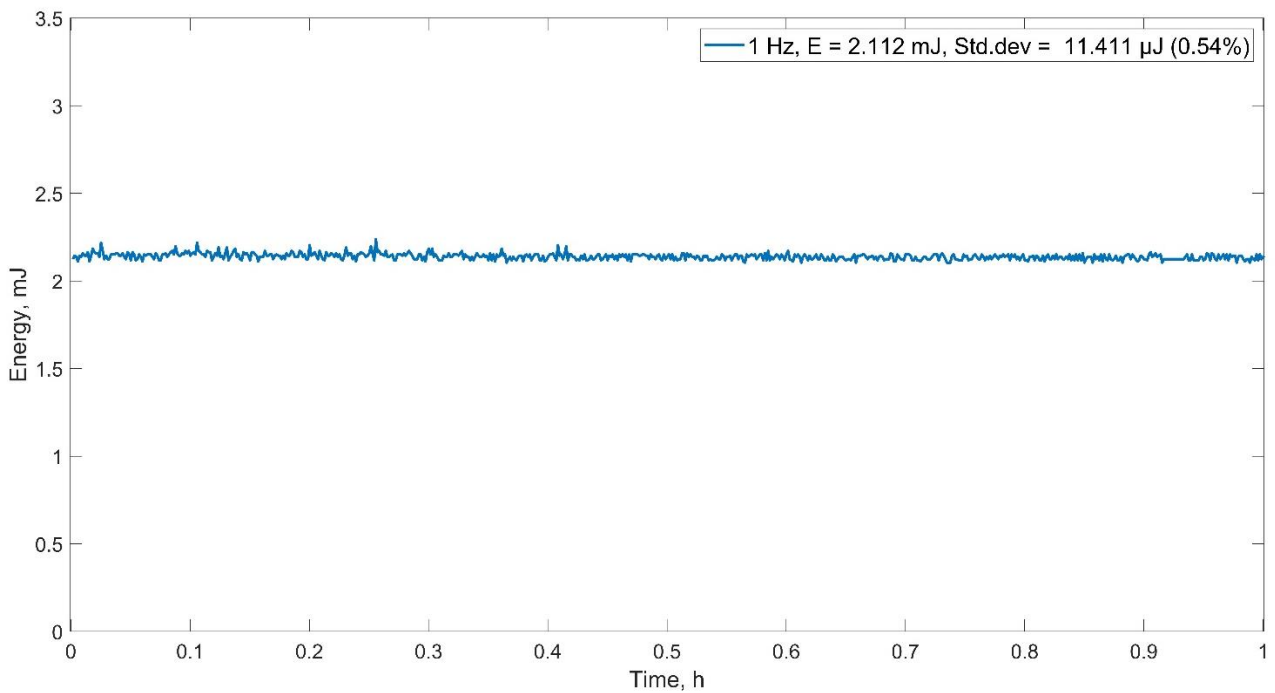

KAUKAS 2 laser average output energy stability for 1 Hz repetition rate at room temperature






Necessary components to run the laser:

	
<p>1534 nm KAUKAS 2 laser</p>	<p>Laser driver</p>
	
<p>Power supply</p>	<p>USB-RS232 adapter</p>

Laser safety class:

	<p>LASER RADIATION AVOID EXPOSURE TO BEAM CLASS 4 LASER PRODUCT</p>
---	---



Laser head schemes:

